

FlexPost-XL™

Heavy-Duty Flexible Sign Post

#	Qty	Part #	Description
1	1	RE-SB	Double Sided Sign Bracket Kit (2 Sign Brackets, 4 Set Screws, & 4 Lock Nuts)
2	2	0176637	5/16" – 18 x 3/8" Cone Point Set Screw
3	1	A-XL-SK	8 x 8" Base & Spring Assembly
4	1	RE-XL-#P	2 3/8" Diameter Galv. Post - .055" Wall


Installation Guides:
flexpostinc.com/install



Anchoring Options

CONCRETE	ASPHALT	HEAVY DUTY ASPHALT	ADHESIVE

GROUND

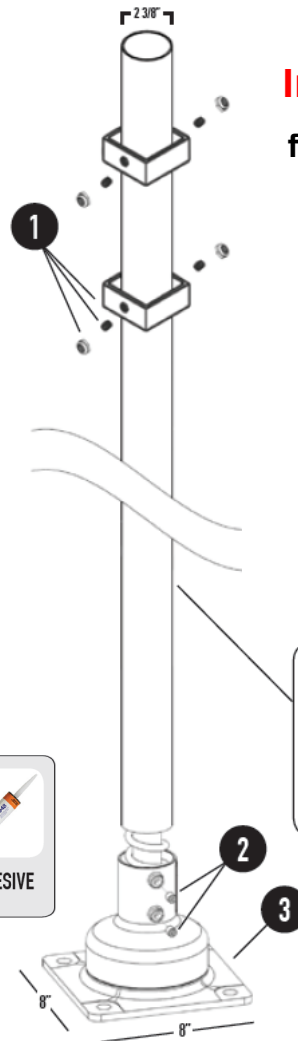

4 CHOICE OF POST	
POST LENGTH	ASSEMBLED HEIGHT
75"	78"
99"	102"
105"	108"



2236 112th Ave., #80 · Holland, MI 49424
888-307-6610 · flexpostinc.com
Email: sales@flexpost.net



FlexPost[®] Quick Start Guide

Step 1: Secure the Base

STANDARD



XL



Types of Anchoring Hardware and Tools Required for Mounting

Asphalt



3/4" Masonry Drill Bit
15/16" Ratchet

Heavy Duty Asphalt



3/8 Cup of Water
7/8" Masonry Drill Bit
9/16" Ratchet

Concrete



High Speed Drill
1/2" Masonry Drill Bit
3/4" Ratchet

Adhesive



Standard Caulk Gun

Ground



3/4" Wrench
3/4" Ratchet

XL Ground



Quick Setting Cement
2 x 1/2" Ratchet

Step 2: Attach Spring [Standard] Insert Set Screw [XL]

STANDARD




1/2" Ratchet

XL



Step 3: Install Bollard (If Applicable)



Step 4: Attach Sign Brackets



Anchoring/Installation/Warranty Info

flexpostinc.com/install

